





# Balanced Spiral Mesh Conveyor Roller Chain Edge

## Request for Quotation

Please supply the following dimensions:

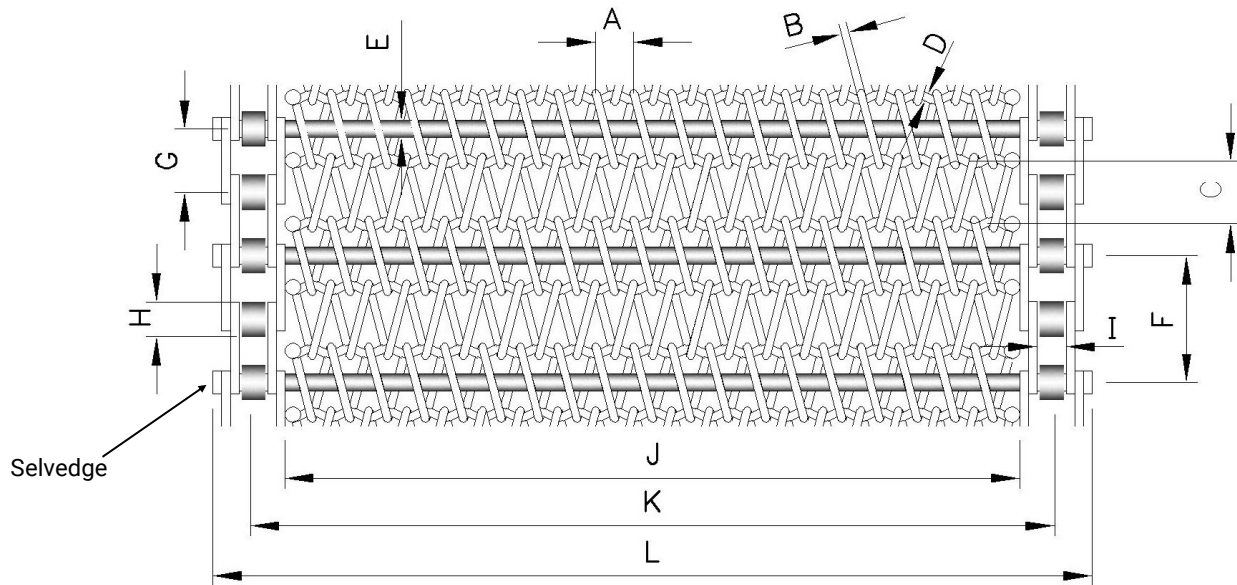

**\*NOTE:** When measuring pitches A & C, it is best practice to measure over 10 pitches and then divide by 10 to obtain the average pitch.

Coil Pitch (A)*:	mm	Chain Pitch (G):	mm
Coil Wire Diameter (B): (If Flat-Wire  , please confirm cross section.)	mm	Chain Roller Dia. (H):	mm
Crimped Cross Wire Pitch (C)*:	mm	Inside Chain Width (I):	mm
Crimped Cross Wire Dia. (D):	mm	Width Between Chains / Mesh Width (J):	mm
Cross Rod Diameter (E):	mm	Chain Centres (K):	mm
Cross Rod Pitch (F):	mm	Overall Width (L):	mm
Large Coil at Cross Rod?    Yes <input type="radio"/> No <input type="radio"/>		Side Chain Style:    Hollow Pin <input type="radio"/> Solid Pin <input type="radio"/>	
Selvedge Finish  Welded Washer <input type="radio"/>  Cotter Pin & Washer <input type="radio"/>		<b>Optional cross rod selvedge finishes:</b> i) <b>Welded Nut (WN)</b> ..... <input type="radio"/> ii) <b>Welded flush to chain through pin joint</b> ..... <input type="radio"/> iii) <b>Welded flush through inner chain plates</b> ..... <input type="radio"/> iv) <b>Other</b> ..... <input type="radio"/>	
Mesh & Cross Rod Material:		Chain Edge Material:	
Please add further information here or on separate sheet (Please note any Markings or Stamps on Chain or Drive Sprockets)			