


Double Balanced Spiral Belting (Improved or Standard) Request for Quotation

Please supply the following dimensions:

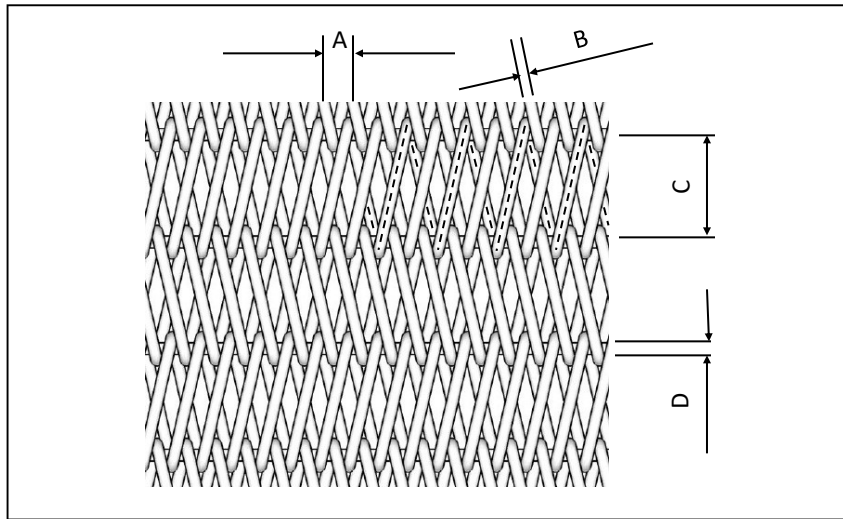

***NOTE:** When measuring pitches A & C, it is best practise to measure over 10 pitches and then divide by 10 to obtain the average pitch.

| | | | | |
|------------------|-----------------------|----|----------------|--------|
| Material: | Overall Width: | mm | Length: | metres |
|------------------|-----------------------|----|----------------|--------|

| | | |
|-----------------------------|---|-----------------------|
| A | Coil Pitch* | mm |
| B | Coil Wire Diameter <i>If Flat-Wire, <input type="checkbox"/> please give cross-section</i> | mm |
| C | Cross Wire Pitch* | mm |
| D | Cross Wire Diameter | mm |
| | Straight Cross Wire (Improved Double Balanced) | <input type="radio"/> |
| | Crimped Cross Wire (Standard Double Balanced) | <input type="radio"/> |
| Standard Welded Edge Finish | | |

If fitted with Side Chains, please confirm the following in the box below:-

- a) Chain pitch, b) Chain centres, c) Cross rod dia., d) Cross rod pitch, e) Rod edge finish, f) Material

Please add further information here or on separate sheet: