




# Duplex Honeycomb Conveyor Belt

## Request for Quotation - Existing Belt Enquiry

Please supply the following dimensions where applicable;

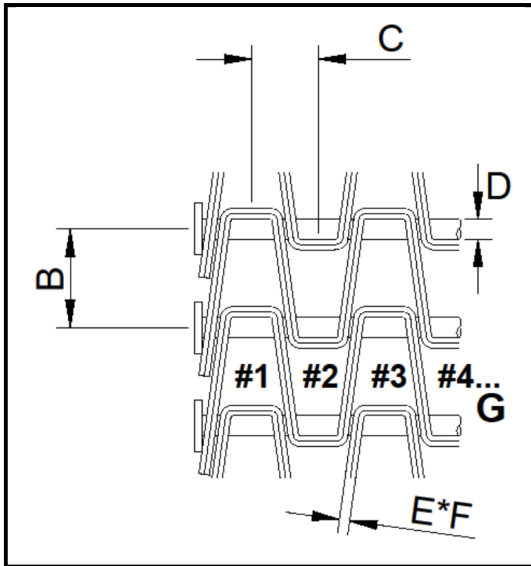

Welded Washer Edge



Welded Nut Edge

\*NOTE: When measuring pitch B, it is best practise to measure over 10 pitches and then divide by 10 to obtain the average pitch

<b>A</b>	<b>Overall Width:</b>	<b>mm</b>	<b>Belt Length:</b>	<b>metres</b>
<b>B</b>	<b>Cross Rod Pitch*:</b>	<b>38.1 mm</b>	<b>C</b>	<b>Nominal Lateral Pitch:</b> <b>25.78mm</b>
<b>D</b>	<b>Cross Rod Diameter:</b>	<b>7.94 mm</b>	<b>E x F</b>	<b>Flat Strip Cross Section:</b> <b>2 @ 2.03mm x 22.23mm</b>
<b>G</b>	<b>Number of Apertures Across Width:</b>	<b>Edge Type:</b> Welded Washer <input type="checkbox"/> Welded Nut <input type="checkbox"/>		
<b>Material:</b> Mild Steel <input type="checkbox"/> / Zinc Plated Mild Steel <input type="checkbox"/> / Stainless Steel 1.4301(304) <input type="checkbox"/> OR 1.4404(316L) <input type="checkbox"/>				

Dimension C (Nominal Lateral Pitch) is based on the number of apertures across the width of the belt. Do not use this dimension to set the sprocket positions. Please enquire if you require sprocket position information.

**Further Information:**