
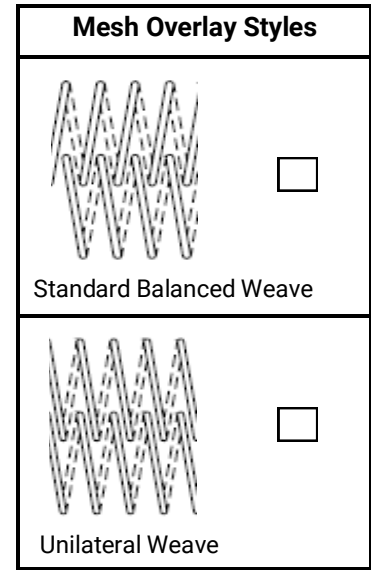


Flexible Rod Belting

Request for Quotation

Please supply the following dimensions:

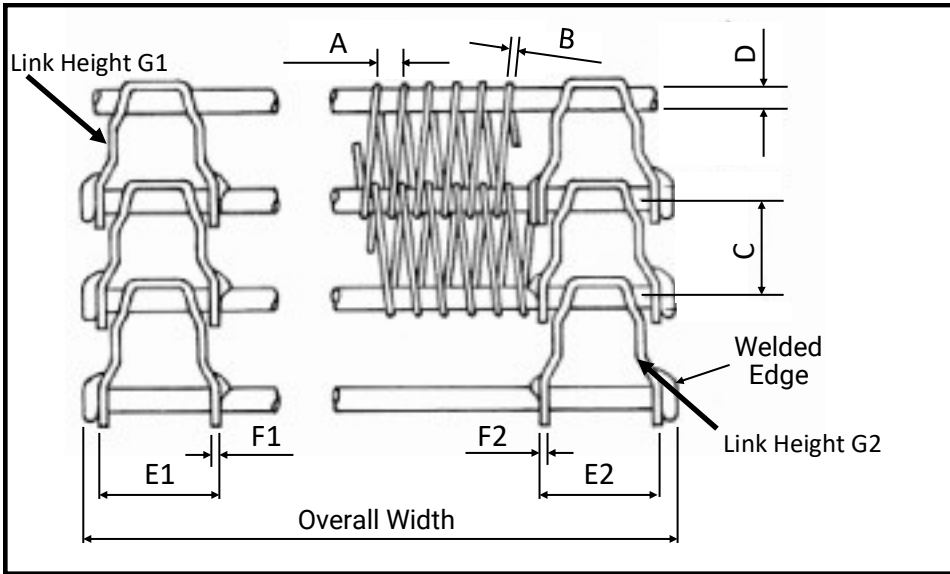

(+) **NOTE:** When measuring pitches A & C, it is best practise to measure over 10 pitches and divide by 10 to obtain the average pitch.

Material:	Stainless Steel	Overall Width:	mm	Required Length:	metres
-----------	-----------------	----------------	----	------------------	--------


A*	Spiral Coil Pitch (+):	mm	D	Cross Rod Diameter:	mm
B*	Coil Wire Diameter:	mm	E	Width of Edge Links: E1	mm, E2
C	Cross Rod Pitch (+):	19.05mm <input type="checkbox"/> / 27.43mm <input type="checkbox"/>	F	Edge Link Thickness: F1	mm, F2
Belt Operation: Side Flexing (Spiral) <input type="checkbox"/> / Straight Running <input type="checkbox"/>			G	Height of Edge Links: G1	mm, G2

For belts with additional links at the centre, please include the above dimensions in 'Further Information'.

Side Flexing Inside Radius: mm.

Cage Diameter: mm.

For Turn Applications: The above (or a sample) must be supplied to ensure correct belt application. Failure to supply may lead to serious issues with your application.



* Not applicable without mesh overlay

Further Information: